

PrintaSleeve



Printasleeve Ltd, Higher Street, West Chinnock,
Crewkerne, Somerset, TA18 7QA

Email: info@printasleeve.com Tel: 01935 881516, Fax: 01935 881314
www.printasleeve.com




Layflat PVC is a glossy surfaced thin wall tube with a fast shrinkdown

- Ideal for tamper-proofing on jars and bottles
- Often used for covering capacitors and battery packs
- Available in bright colours enhancing the finish of products
- Resistant to most chemicals and oils
- UL approved
- Can be plain or custom printed
- Can be supplied with perforations
- Can be supplied as cut sleeves or continuous lengths

Material Characteristics:

Operating Temperature Range:	-40°C to +105°C	
Shrink temperature	100°C	
Tensile Strength:	450 kg/cm ²	JIS 6723
Ultimate Elongation:	100%	JIS 6723
Specific Gravity:	1.2/1/3	ASTM D1505
Dielectric Strength:	20KV	JIS 8430
Spec:	UL 224 VW1	
RoHS:	Fully compliant	
Standard Colours:	Clear, White, Black, Red, Yellow, Blue (other colours also available)	
Layflat sizes:	4mm up to 260mm	
Wall Thicknesses:	0.7mm to 0.15mm	

Test Method

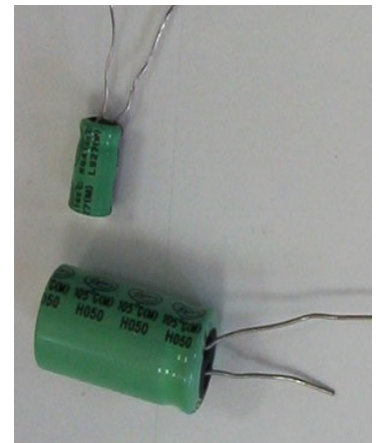

Reference	Lay-Flat Size (mm)	Tolerance (+/-mm)	Wall Thickness (mm)
L/F	5.8 -14	+0.5/-0	0.05-0.10
L/F	15-24	+0.8/-0	0.05-0.15
L/F	25-39	+1.0/-0	0.05-0.30
L/F	40-54	+1.3/-0	0.05-0.30
L/F	55-74	+1.5/-0	0.05-0.30
L/F	75-91	+2.0/-0	0.05-0.30
L/F	92-149	+3.0/-0	0.05-0.30
L/F	150-199	+4.0/-0	0.10-0.025
L/F	200-249	+6.0/-0	0.10-0.20
L/F	250-260	+8.0/-0	0.10-0.15



Other sizes available on request

Can be supplied in various quantities

Other grades of heatshrink are available. Please refer to our website - www.printasleeve.com